



E-Mobility Testing Solutions

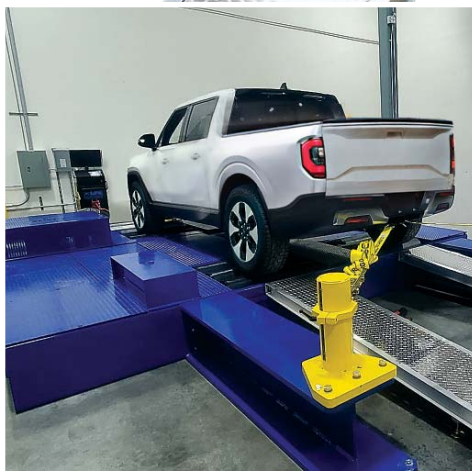

MAE-AWD-500-AC/EC Series

*The Benefits of a Certification Grade Chassis
Dynamometer at the Fraction of the Price*

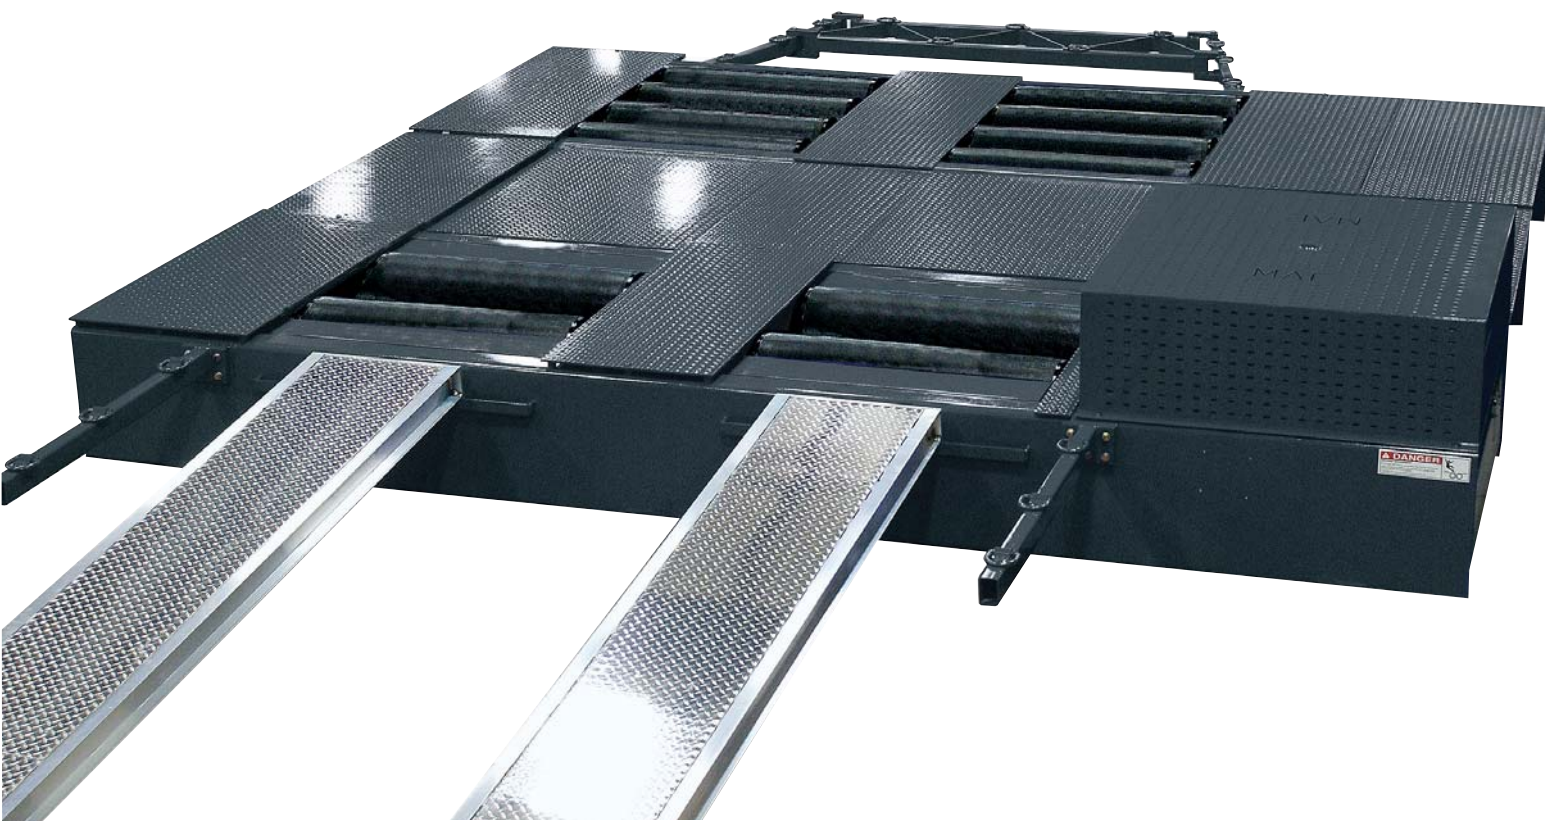



All-Wheel Drive Chassis Dynamometer



Larger roll design version available



AC Motor, Eddy Current and Inertia Fly-wheel design



Robotic pedal-throttle actuators for automatic driving



MAE-AWD-500-AC/EC

With the growing market of electric vehicle (EV, BEV, HEV, PHEV, FCEV), Mustang Advanced Engineering has developed a series of chassis dynamometers to provide highly accurate and sophisticated EV R&D and production test stands that are both cost-effective and loaded with advanced testing and inertia simulation capabilities.

- 2WD & Mechanically-linked AWD Models Available
- Multiple AC Motor & EC PAU Size Combinations
- Regenerative Brake Testing w/ AC Motor
- Emissions & Hybrid Development: SAE 1634 for EV and full CFR 1066 compliance for vehicle evaporative emissions
- AWD dynamometer has light duty transient drive cycle capabilities including: WLTP, FTP 75 (Light Duty), EPA US06 Supplemental FTP Driving Schedule (Light Duty), SC03 Test Cycle
- Calibration & Certification
- Efficiency Energy Loss Evaluation of EVs
- Precision Inertia Simulation
- kWh/mile Evaluation for EVs
- Thermal Imaging & Vibration Analysis
- Battery Power Measurement Available
- SAE J2264 Road Load Derivations Compliant within +/-3-lbs nominal
- Optional robot driver for automatic continuous driving
- Cost effective road load simulation, including Davis Dam Test

Why Chassis Dynamometers

The MAE-AWD-500-AC/EC Series chassis dynamometers are designed for pre-certification development and testing of 2WD and AWD hybrid and electric vehicles. AWD models feature a mechanically linked roller system that supports wheelbases from 84" to 183" without roller adjustment. The system synchronizes the front and rear rollers to the same road speed, simulating a flat, dry road and preventing unwanted activation of the vehicle's traction control system. This allows the vehicle's torque management system to operate as it would under normal road conditions, providing accurate and reliable AWD testing.

The MAE-AWD-500-AC/EC series incorporates an AC drive motor and a powerful air-cooled eddy current power absorption unit to provide the perfect combination of precision and economy. Systems are available with AC Motors ranging from our standard 100-hp motor up to large motors depending on your application. The system comes with one or two air-cooled eddy current PAUs for extended testing to meet the needs of your application.

Battery Power Measurement

MAE's Battery Power Measurement Module is designed to accurately measure a vehicle's battery power while being operated on the dynamometer. The option provides continuous measurement of the voltage and current of the batteries, which can be displayed on the operator interface display and collected by the data acquisition system for graphing and analysis. The option includes a robust clamp-on current transducer, industrial battery clamps/cables, and isolation/signal conditioning modules integrated with the dynamometer control system package.

EV R&D, Calibration, Pre-Certification

For vehicle development, calibration and certification applications, the 500-AC/EC Series provides a cost-effective design and enables quick development cycles for performing initial hybrid and electric vehicle calibrations, traction system motoring and ABS/ESC testing with skid simulation, regenerative braking and limited traction condition simulations using road load and federal drive cycles, electrical power systems analysis, HEV/PHEV/EV controller development, efficiency testing, fuel consumption testing, repair & maintenance and other complete vehicle or sub systems evaluations. In addition to our industry standard PowerDyne PC Software, MAE offers a number of flexible lab-grade software and data acquisition packages for Hardware-in-the-loop and R&D environments.



Customizable drive cycles include speeds and grades


MAE-500-AC/EC Series

Roll Diameter:	12.625" (320.68 mm) <i>Larger roll versions are available</i>
Roller Surface:	Knurled (Standard), Optional: Chrome, Carbonite
Rotation:	Uni-Directional
Roll Face Length:	37" (940 mm)
Roll Inner Track Width:	24" (610 mm)
Roll Outer Track Width:	98" (2489 mm)
Maximum Roller Speed:	150 MPH (241 KPH); <i>Higher speeds optional</i>
HP Measurement:	2WD - 1,500HP (1118.55 Kw) (Traction Limited) AWD - 3,000HP (2237.10Kw)
AC Motor Rating:	100-HP @ 65-150 MPH; <i>Larger motors are available</i>
Peak PAU Absorption:	900-hp (671.13 Kw)
Torque Flange Accuracy:	± 0.05% F.S.
Torque Measurement:	HBM Torque flange
Speed Measurement:	Encoder - accuracy <0.01% F.S.
System Response Time:	100 ms nominal
Front & Rear Roll Synchronization:	Mechanically-Linked / Coupled
2WD / AWD Switch	Optional: Pneumatic On/Off Coupling
Wheelbase range and Inertia Values	
Standard AWD	84" to 126" ; 3,360 lbs of inertia 2,133.6 mm to 3,200.4 mm ; 1,524 kg of inertia
Full-size AWD	84" to 140" ; 3,700 lbs of inertia 2,133.6 mm to 3,556 mm ; 1,678 kg of inertia
Full-size AWD Premium	98" to 126" ; 4,000 lbs of inertia 2,489.2 mm to 3,200.4 mm ; 1,814 kg of inertia optional clutched inertia: 5,900 lbs; 7,800 lbs 2,177 kg; 3,538 kg
Extended AWD	84" to 154" ; 4,040 lbs of inertia 2,133.6 mm to 3,911.6 mm ; 1,832 kg of inertia
HD AWD*	84" to 183" ; 4,720 lbs of inertia 2,133.6 mm to 4,648.2 mm ; 2,141 kg of inertia
<i>*Available with a dual-range option, 84-126-inches or 84-183-inches via a second on/off coupling</i>	
Maximum Axle Weight:	6,000 lbs. (2,722 kg) per axle <i>Custom heavier axle weights available</i>
SAE J2264 Road Load Derivations:	+/-3-lbs nominal

Note: Inertia is expressed in equivalent vehicle weight term




MAE has been the E-mobility dyno supplier for Tesla, Rimac, Lordstown Motors, GM and many others, even developed the first EV test stand dynamometer with General Motors in the late 90's (EV1 Project)

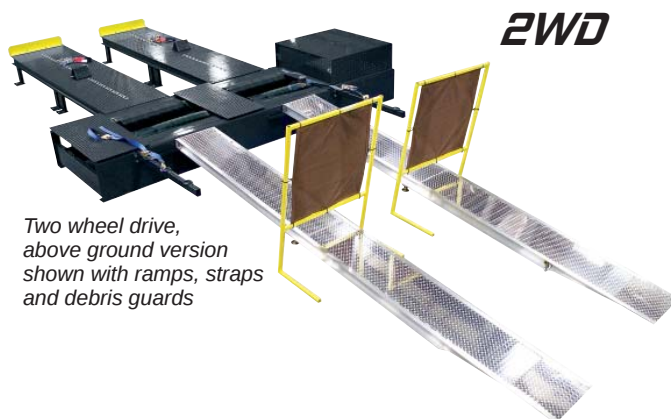

Two wheel drive, above ground version shown with ramps, straps and debris guards

Mustang Advanced Engineering

EV Powertrain Test Cell

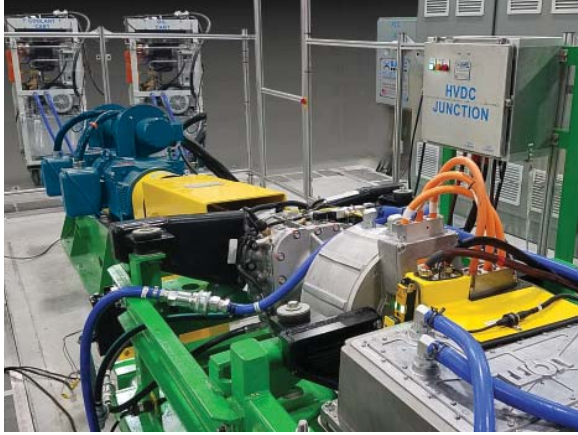

EV e-Axle Test Stand



Mustang Advanced Engineering

2300 Pinnacle Parkway

Twinsburg, OH 44087

Phone: (330) 963-5400

Fax: (330) 425-3310

Email: Sales@MustangAE.com

MustangAE.com

Global Leaders in EV Testing

MAE is a test cell system integrator capable of supplying turnkey, fully functional, integrated test cell solutions. MAE draws on more than 35 years of equipment production and test cell integration experience to provide customers the perfect test cell for their requirements. MAE leverages our vast test cell experience and our safety minded engineers to develop test cells that are safe and meet local and national safety requirements. Safety is achieved through physical barriers, electrically lockable access barriers monitored until conditions are safe to unlock, guards, dual hand touch pads, light curtains, electrical lockable doors/covers, pressure pads, lights, lamps and sound. Safety is also designed into the high-power electrical systems with lock-out/tag-out requirements, arc flash analysis and facility interface design.

Additional EV Test Articles

MAE is poised to serve the Electric Vehicle markets (EV, BEV, HEV, PHEV, FCEV) and its current and future testing needs. Additional test stands MAE has designed and created include:

- Electric Powertrain
- Electric Motors
- Electric Motor Control Units
- Electric DC/DC Converters
- Battery Simulators
- Components and accessories
- Climate controller interfaces
- Inverters
- Fuel Cells
- Gearboxes
- Batteries
- Coolant conditioning systems
- Hydrogen fuel supply systems
- Test article interfaces

About MAE

Mustang Advanced Engineering is a leading supplier of advanced, custom engineered testing and measurement systems. Located in Twinsburg, Ohio since 1986, MAE delivers world-class testing solutions, custom design support, technical assistance, backed by a dedicated factory service team, making them a trusted source of expertise for the global industrial market. Visit MustangAE.com for more information. Follow them on Facebook, Twitter, LinkedIn, and Instagram

